


ADDO®

NanoDiamonds-NanoGraphite additive
to engine oils

PlasmaChem GmbH
Rudower Chaussee 29
12489 Berlin
Germany
www.plasmachem.com
info@plasmachem.com

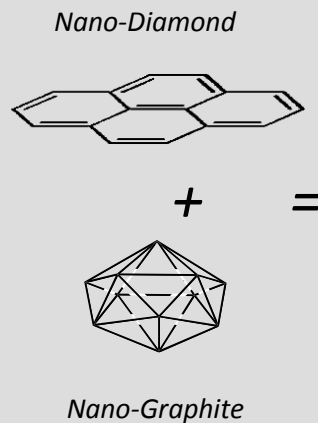

RECOMMENDATION FOR TREATMENT OF INTERNAL COMBUSTION ENGINES WITH THE MULTIFUNCTIONAL COMPOUND “ADDO”

PURPOSE OF USE:

The treatment is performed for elimination of consequences of wear in cylinder-piston group, gas-distribution and connecting rod gear systems, recovery of oil pressure levels, compression and torque, and extension of life-time of engine.

INSTRUCTION OF USE:

1. For a longer function of the additive, it is recommended to change oil before filling in ADDO.
2. Shake the flask strongly for few seconds and pour into the crankcase.
3. Start the engine and run it at least for 10 minutes
4. ADDO should be added at each second oil change.

Remark:

ADDO is not recommended for use in mechanically damaged engines